

As a global leader in the HVAC-R industry, we rely on more than 90 years of experience and expertise to deliver the highest quality solutions and services.

Daikin air purifiers uphold our promise to provide cleaner and healthier indoor climates in homes, offices and commercial spaces around the world. Because our care for the planet is absolute, our air purifiers are designed with the latest technology to consume less energy and reduce their environmental impact.

Our commitment to quality also means providing the best service experience for our customers. From on-site support and installations to troubleshooting and maintenance, our experts are here to help you achieve the perfect climate.

MC55W / MC55VB

- Pure air thanks to air purification technologies
- > Catches fine particles of dust
- > Powerful suction and whisper quiet
- > New stylish and compact design





Single Unit				MC	55W / 55VB
Application					Floor standing type
Applicable room area					41
Dimensions	Unit	Height x W	/idth x Depth	mm	500 x 270 x 270
Weight	Unit			kg	6.8
Casing	Colour				White
	Туре				Multi Blade Fan (Sirocco fan)
Fan	Air flow rate	Air purifying operation	Silent/ Low/ Medium/ Turbo	m³/h	66 / 120 / 192 / 330
Sound pressure level	Air purifying operation		Silent/ Low/ Medium/ Turbo	dBA	19/29/39/53
Air purifying operation	Power input		Silent/ Low/ Medium/ Turbo	kW	0.008 / 0.010 / 0.015 / 0.037
Deodorizing method					Flash streamer + Deodorizing catalyst
Dust collecting method					Electrostatic HEPA filter
Air filter	Туре				Polyethylene terephthalate net
Sign	ltem	01			Dust Sign: 3 stages / Odour: 3 stages / Anti-pollen mode / Child proof lock lamp / PM _{2s} sensor lamp: 6 stages / Airflow rate: Quiet/Low/Standard/ Turbo / AUTO FAN mode / Econo mode / ON/OFF lamp / Streamer lamp
Power supply	Phase/Frequency/Voltage H:			Hz/V	1~/50/60/220-240/220-230
Power plug					W: C type / VB: G type (UK)
Туре					Air Purifier

The applicable room area is appropriate for operating the unit of maximum fan speed (HH). Applicable room area indicates the space where a certain amount of dust particles can be remover in 30 minutes. (LEM 1467) |
Operating sound levels are the average of values measured at Im away from the front, left, right and top of the unit. (These are equal to the values in an anechoic chamber) | Electrostatic HEPA filter is attached in the unit. |
Other function: Active plasmation function. Auto-restart function.

About the dust collection and deodorizing capacity of an air purifier:

- Not all harmful substances in cigarette smoke (carbon monoxide, etc.) can be removed.
 Not all odour components that emanate continuously (from building materials and pets, etc.) can be removed.
- The Daikin air purifier is not a medical device and is not meant to be used as a substitute to any medical or pharmaceutical treatmen

FSC

Daikin Europe N.V. Naamloze Vennootschap Zandvoordestraat 300 · 8400 Oostende Belgium • www.daikin.eu · BE 0412 120 336 · RPR Oostende (Publisher)

The present publication is drawn up by way of information only and does not constitute an offer binding upon Daikin Europe NV. Daikin Europe NV. has complete the content of this publication to the best of its knowledge. No express or implied warranty is given for the completeness, accuracy, reliability or fitness for instructual purpose of its content and the products and services presented therein. Specifications are subject to change without prior notice. Daikin Europe NV. explicitly rejects any liability for any direct or indirect damage, in the broadest sense, arising from or related to the use and/or interpretation of this publication. All content is copyrighted by Daikin Europe NV.

rinted on non-chlorinated paper





Pure air thanks to active plasma ion discharge and flash streamer technology

High performance HEPA filter to catch fine particles of dust

Powerful suction and whisper quiet

New stylish and compact design

Daikin's unique double method

- 1. The Streamer unit, a high power plasma discharge technology, decomposes harmful substances* inside the unit. These substances are either trapped on the HEPA filter or adsorbed to the deodorizing filter element.
- 2. The Active Plasma Ion generation unit provides further purification to the space, by adding purifying elements to the cleaned air. These could for example assist to deodorize smelling curtains and carpets.
- Substances including: viruses¹, bacteria², pollen³, mould spores⁴



- 1 Testing organization: Kitasato Research Center for Environmental Science; Test result certificate 21 0026 (issued by same organization); Result of experiment: 99.9% removal of A-H1N1 virus after 1 hour.
- Testing organization: Japan Food Research Laboratories. Test number: 15044988001-0201. Test method Attached a test piece inoculated with bacteria liquid on the upstream side of a dust collection filter installed in an air purifier, and operated it in a test area of 25 m³. Counted the number of live bacteria after five hours. Test result: Reduced by more than 99% in five hours. Test unit: Tested with MCK55S (Japanese model), a model equivalent to MCK55W series (turbo operation).
- 3 Various allergens were irradiated by streamer discharge and the breakdown of protein in the allergens was verified using the ELISA method, cataphoresis, or an electron microscope (Joint research with Wakayama Medical University). Test example: Japanese cedar pollen Cryj-1'; Test result: 99,6% or more decomposed and removed in 2 hours
- 4 Testing organization: Japan Food Research Laboratories, Test number: 204041635-001. Test result: 99.9% or more of mould (Cladosporium) spores decomposed and removed in 24 hours

Three steps to decompose harmful substances

Powerful suction

Takes in air over a wide area from 3 directions.



Effective capturing of pollutants

Efficiently catches dust and pollutants with an electrostatic HEPA filter.



Decomposition



Uses Daikin's Streamer technology to decompose, by oxidation, harmful substances caught on the filter.

The Streamer Symbol consists of three C's




CLASH: The dust collection filter catches the floating substances with the attached harmful gases and Streamer decomposes the gases by oxidation.


CYCLE: The deodorising filter adsorbs and decomposes odour. Thanks to the regeneration of the adsorbing capacity, the deodorising capacity is maintained. No need to change the deodorising filter, unlike air purifiers with activated carbon filters.


CLEAN: Removes bacteria from dust collection filter.

High performance HEPA filter to catch fine particles of dust




- \rightarrow Removes 99,97% of fine particles of 0,3 μ m
- > Filter fiber itself is charged with static electricity, and collects particles efficiently
- > Doesn't clog easily, hence less pressure loss





Compact, effective and quiet thanks to the new, innovative structure



Model debut in a compact and stylish design

** Calculated by test method based on Japan



Different filters for the best indoor air

UK plua

JEM1467



Triple Detection sensor to quickly detect air pollution

Equipped with a high sensitivity dust sensor that distinguishes small particles such as PM_{3,5} and larger particles of dust and reacts accordingly. Triple detection of dust, PM_{3,5} and odour is provided.







Humidification and purification in one

Pure air thanks to active plasma ion discharge and flash streamer technology

High performance HEPA filter to catch fine particles of dust

Powerful suction and whisper quiet

New stylish and compact design

Why choose Daikin?

products and solutions.

to provide comfortable indoor climates in homes, offices and commercial spaces around the world. Based on a tradition of technological and design excellence, our air purifiers reduce the presence of pollutants, allergens and moulds to provide clean air and healthier indoor environments.

Daikin's unique double method


- 1. The Streamer unit, a high power plasma discharge technology, decomposes harmful substances* inside the unit. These substances are either trapped on the HEPA filter or adsorbed to the deodorizing filter
- Substances including: viruses1, bacteria2, pollen3, mould spores4

2. The Active Plasma Ion generation unit provides further purification to the space, by adding purifying elements to the cleaned air. These could for example assist to deodorize smelling curtains and carpets.






Plasma discharge emits high-speed electrons.



The electrons collide and combine with nitrogen and oxygen in the air to form four kinds of elements.



These elements provide decomposition power.

- nization: Kitasato Research Center for Environmental Science; Test result certificate 21_0026 (issued by same organization); Result of experiment: 99.9%
- removal of A-H1N1 virus after 1 hour.
 Testing organization: Japan Food Research Laboratories. Test number: 15044988001-0201. Test method: Attached a test piece inoculated with bacteria liquid on
- lesting organization: Japan Food Research Laboratones. Jest number: 15044988001-0201. Jest method: Attached a test piece inoculated with bacteria liquid on the upstream side of a dust collection filter installed in an air purifier, and operated it in a test area of 25 m². Counted the number of live bacteria after five hours. Test result: Reduced by more than 99% in five hours. Test unit: Tested with MCK555 (Japanese model), a model equivalent to MCK55W series (turbo operation). Various allergens were irradiated by streamer discharge and the breakdown of protein in the allergens was verified using the ELISA method, cataphoresis, or an electron microscope (Joint research with Wakayama Medical University). Test example: 'Japanese cedar pollen Cryj-1'; Test result: '99,6% or more decomposed and removed in 2 hours.
- Testing organization: Japan Food Research Laboratories. Test number: 204041635-001. Test result: 99.9% or more of mould (Cladosporium) spores decomposed and removed in 24 hours



Three steps to decompose harmful substances

1 Powerful suction

Takes in air over a wide area from 3 directions.

2 Effective capturing of pollutants

Efficiently catches dust and pollutants with an electrostatic HEPA filter.

3 Decomposition


Uses Daikin's Streamer technology to decompose, by oxidation, harmful substances caught on the filter.







The Streamer Symbol consists of three C's



CLASH: The dust collection filter catches the floating substances with the attached harmful gases and Streamer decomposes the gases by oxidation.

CYCLE: The deodorising filter adsorbs and decomposes odour. Thanks to the regeneration of the adsorbing capacity, the deodorising capacity is maintained. No need to change the deodorising filter, unlike air purifiers with activated carbon filters.

CLEAN: Removes bacteria from dust collection filter and humidifying filter.

High performance HEPA filter to catch fine particles of dust

Removes 99% of particles between 0.1µm and 2.5µm in size

The filter collects dust efficiently with electrostatic forces. It is not prone to clogging compared with non-electrostatic HEPA filters which collect particles only by the fineness of the mesh.


Therefore, a larger amount of air can pass through the filter.

The filter can purify a larger amount of air!


Electrostatic HEPA filter

versus Non-electrostatic filter

- > Removes 99,97% of fine particles of $0.3\mu m$
- > Filter fiber itself is charged with static electricity, and collects particles efficiently
- > Doesn't clog easily, hence less pressure loss
- > Because it catches particles relying only on mesh size, it is necessary to make mesh finer, making it easy to be clogged and cause high pressure loss




Small footprint




Compact, effective and quiet thanks to the new, innovative structure

27 cm

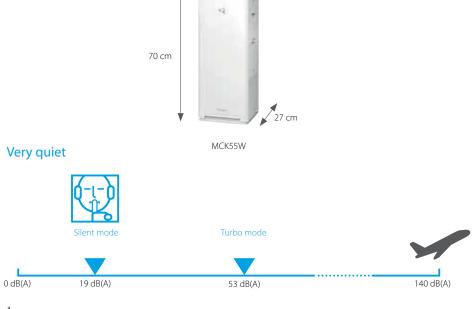


Unique vertical structure

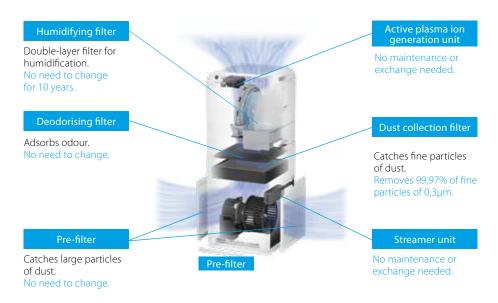

It may become necessary to change out items that usually do not require replacing due to environmental and operational conditions.


MCK55W HUMIDIFICATION DUST COLLECTION DEODORISATION

Capacity in turbo operation mode

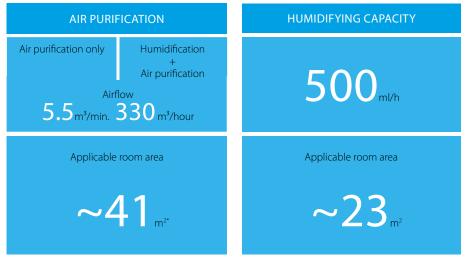

^{*} Calculated by test method based on Japan Electrical Manufacturers' Association Standard JEM1467.

Powerful humidification to protect against Air Dryness and viruses

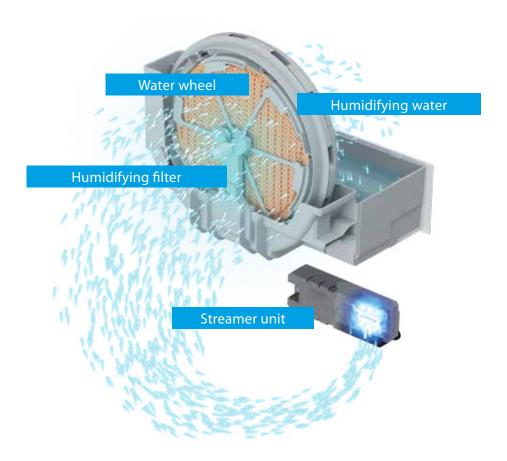

Triple Detection sensor to quickly detect air pollution



Equipped with a high sensitivity dust sensor that distinguishes small particles such as $PM_{2.5}$ and larger particles of dust and reacts accordingly. Triple detection of dust, $PM_{2.5}$ and odour is provided.



MCK55W

- > Protects the skin, the throat and the nostrils from dryness
- Protects against viruses by maintaining appropriate humidity of the room
- > Indicates humidity of the room
- > Eliminates bacteria on the humidifying



Single Unit A					55W
Application					Floor standing type
Applicable room area					41
Dimensions	Unit	HeightxWidthxDepth			700 x 270 x270
Weight	Unit			kg	9.5
Casing	Colour				White
Fan	Type				Multi Blade Fan (Sirocco fan)
	Air flow rate	Air purifying operation	Silent/ Low/ Medium/ Turbo	m³/h	54 /120 /192 /330
		Humidifying operation	Silent/ Low/ Medium/ Turbo	m³/h	102 /144 /192 /330
Sound pressure level	Air purifying operation	Silent/Low/Medium/ Turbo		dBA	19.0 /29.0 /39.0 /53.0
	Humidifying operation	Silent/Low/Medium/ Turbo		dBA	25.0 /33.0 /39.0 /53.0
Humidifying operation	Power input	Silent/L/M/Turbo		kW	0.011 /0.014 /0.019 /0.058
	Humidi- fication	Silent/Low/Medium/ Turbo		ml/h	200 /240 /300 /500
	Water tank ca	apacity		- 1	2.7
Air purifying operation	Power input	Silent/L/M/Tu	rbo	kW	0.007 /0.010 /0.017 /0.056
Deodorizing method					Flash streamer + Deodorizing catalyst
Dust collecting method	t				Electrostatic HEPA filter
Air filter	Туре				Polyethylene terephthalate net
Sign	Item	01			Dust: 3 stages / Odour: 3 stages / Anti-pollen mode / Water supply lamp / Child proof lock lamp / ON/OFF lamp / Streamer lamp / Econo mode / MOIST mode / AUTO FAN mode / PM ₂₅ sensor lamp: 3 stages / Humildity montor lamp: 5 stages / Humildity setting: Low/Standard/High / Airflow rate: Quiet/Low/Standard/Turbo / Humidity on/off
Power supply	Phase/Frequency/Voltage Hz/V			Hz/V	1~/50/60/220-240/220-230
Туре					Humidifying air purifier

The applicable room area is appropriate for operating the unit of maximum fan speed (HH). Applicable room area indicates the space where a certain amount of dust particles can be remover in 30 minutes. (JEM 1467) | Humidification amount changes in accordance with indoor and outdoor temperature and humidity. Measurement condition: 20°C in temperature, 30% in humidity. | Operating sound levels are the average of values measured at 1m away from the front, left, right and top of the unit. (These are equal to the values in an anechoic chamber) | Electrostatic HEPA filter and humidifying filters are attached in the unit.

Functions

Dust (PM _{2.5} /dust) and odour sensor lamps	X
Streamer discharge	X
Active plasma ion	x
Electrostatic HEPA filters	x
Streamer regenerated deodorizing filter	x
Econo mode	x
Auto fan mode	x
Anti-pollen mode	x
Turbo mode	x
Child proof lock	х
Brightness adjustment	x
Auto restart after power failure	x
Stabilizer free	х



About the dust collection and deodorizing capacity of an air purifier:

- Not all harmful substances in cigarette smoke (carbon monoxide, etc.) can be removed.
- Not all odour components that emanate continuously (from building materials and pets, etc.) can be removed.

The Daikin air purifier is not a medical device and is not meant to be used as a substitute to any medical or pharmaceutical treatment.

FSC

FCPFN20-70

07/20



 $\label{eq:paikin_europe} \textbf{N.V.} \ \ \text{Naamloze Vennootschap Zandvoordestraat 300} \cdot 8400 \ \ \text{Oostende} \cdot \ \ \text{Belgium www.daikin.eu} \cdot \ \ \text{BE 0412 120 336} \cdot \ \ \ \text{RPR Oostende (Publisher)}$

The present publication is drawn up by way of information only and does not constitute an offer binding upon Daikin Europe N.V. Daikin Europe N.V. Bas compiled the content of this publication to the best of its knowledge. No express or implied warranty is given for the completeness, accuracy, reliability or fitness for particular purpose of its content and the products and services presented therein. Specifications are subject to change without prior notice. Daikin Europe N.V. explicitly rejects any liability for any direct or indirect damage, in the broadest sense, arising from or related to the use and/or interpretation of this publication. All content is copyrighted by Daikin Europe N.V.

Printed on non-chlorinated paper